

iSTEP INTELLIGENT DIAPHRAGM PUMPS



iSTEP FOR DEMANDING METERING REQUIREMENTS

iSTEP - DIE INTELLIGENTEN MEMBRANPUMPEN

The iSTEP combines an intelligent drive concept with the accuracy of a diaphragm dosing pump and sets standards with regard to reproducibility and reliability. By means of the variable frequency control and a power range of 0.007..200 l/h at 10..3bar, the application possibilities are almost unlimited. It is intuitive to use, long lasting and is particularly suitable for demanding dosing tasks.

SCOPE OF APPLICATION

- Chlorine dosing for the treatment of drinking water
- Flocculating agent dosing in wastewater treatment
- Dosing of flocculant aids
- CIP Use

INPUTS & OUTPUTS

- 3 inputs programmable as
 3x digital inputs
 2x analogue inputs 0/4...20mA
- 2 digital outputs
- 1 analogue output for 0/4...20mA signal
- All inputs and outputs can be freely parameterised

OVERVIEW OF ADVANTAGES

- Extremely high performance range with only one pump
- Adjustment range 1:1000, thereby optimally adaptable
- Low-pulsation dosing
- Microprocessor-controlled drive
- Remote execution
- Energy-efficient drive technology (annual energy costs below 100 euro)
- Batch dispensing with recipe storage
- Intuitive menu guidance, including parameterisation
- Pulse transformation and reduction
- Weekday/timer functions with 10 storage spaces
- Low chemical consumption due to high dosing accuracy
- Slow mode operation for viscous media



FUNCTIONS AND MODES OF OPERATION AT A GLANCE

Operating Modes & Messaging	Pro	Pro+
Manual	✓	✓
Pulse	✓	✓
Analogue	✓	✓
Batch	✗	✓
Timer	✗	✓
Interface	✗	✓
Calibration	✓	✓
Slowmode	✓	✓
Suction mode	✓	✓
Diaphragm monitoring	✓	✓
Data logging (SD-Card)	✗	✓
Error messaging	Error code + color change in the display	Plain text + color change in the display
Clock for data & time	✗	✓

Connection & Control	Pro	Pro+
Control elements & Display	4-button control Multilingual display 4-color status indicator	Removeable handheld with two buttons and clickwheel Display with 8 languages (de, en, es, fr, nl, cs, fi, tr) 4-color status indicator
Control cable	optional	5m control cable (8-pole)
In-/Output connection	✓	✓
Level connection	✓	✓
Flow monitor & measurement connection	✗	✓
Profibus / Profinet	✗	optional
Inputs	Digital pulse (NO/NC) * Digital extern stop (NO/NC) * Analogue 4-20mA	Digital/analogue, free parametrizable Digital/analogue, free parametrizable Digital, free parametrizable
Outputs	24V Ready to run (NO/NC) * Stroke signal (NO/NC) *	24V Digital, free parametrizable Digital, free parametrizable Analogue, free parametrizable
Updateable	USB (Stick)	USB (to host)

*NO/NC (normally open/normally closed)

ADDITIONAL FEATURES


APPLICABLE INTERNATIONALLY

The CE and TR certifications are proof of the safe use of the iSTEP in all relevant markets. Individual power plugs (voltage range 100-240V) ensure smooth operation anywhere in the world, and the display is available with nine menu languages (de, en, es, fr, nl, cz, fi, tr, sv), enabling intuitive operation internationally.



STANDARD AND SLOW MODE OPERATION

The iSTEP allows different speeds of suction and pressure stroke depending on the desired flow amount and suction height. This results in a constant flow rate and, thereby, a gentle and low-pulsation dosing. When transporting viscous media, a slow mode function (in contrast to standard operation) enables a reduction of the maximum suction speed.

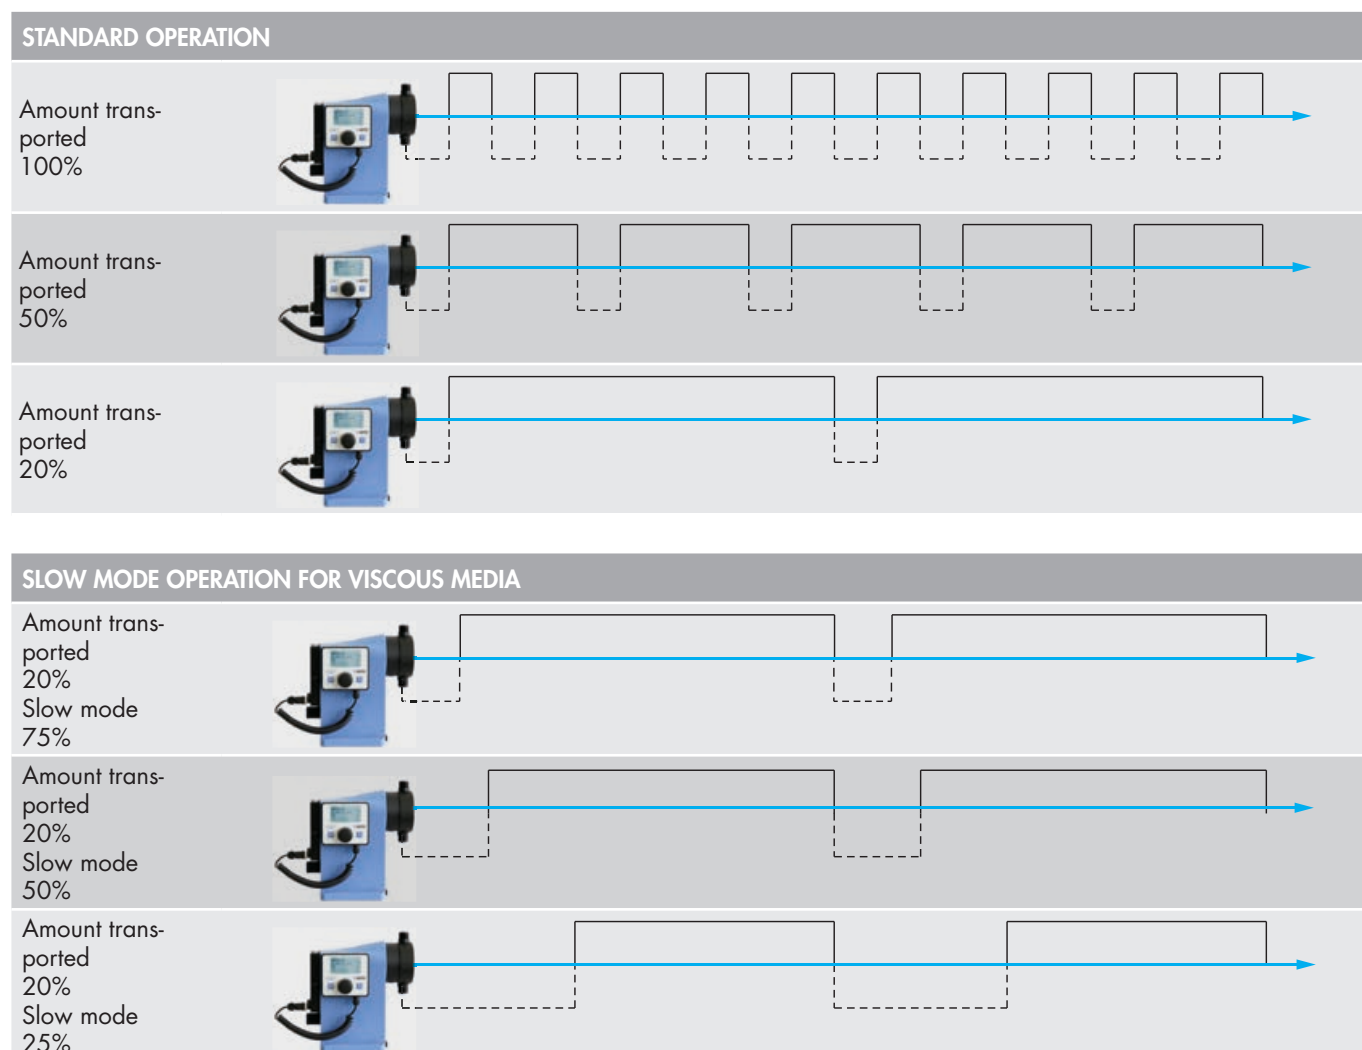

ADDITIONAL FEATURES (PRO+)



EASY PARADOSING OF SEVERAL PUMPS BY MEANS OF REMOVABLE CONTROL ELEMENT


The iSTEP (Pro+) is operated via the detachable control element by means of keys and a click-wheel. It ensures the rapid commissioning of several pumps with the same function. The parameterisation of an iSTEP is saved in the control element. Subsequently, the control element can be connected to other pumps and the stored parameters can be transferred. Operation without a control element is also possible, since there is also an additional status LED as well as a start/stop button directly on the pump.

PROFIBUS- / PROFINET-INTERFACE MODULE (OPTIONAL)

The control electronics of the iSTEP (Pro+) can be expanded by interface modules for PROFIBUS or PROFINET networks.

The PROFIBUS INTERFACE MODULE has a level input and two connections, with which the iSTEP can be directly integrated into a bus system. The connection / termination directly on the module. Additional distributors are not required.

The PROFINET INTERFACE MODULE offers the possibility of integrating the dosing pump into a ProfiNet network. With two ProfiNet connections, it can be integrated in both ring and tree structures.

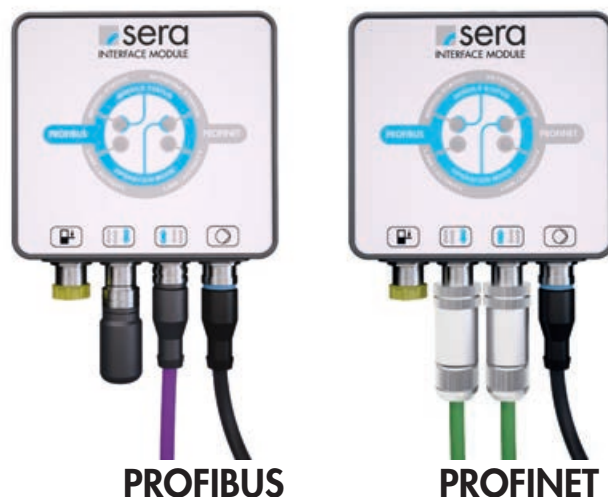


OPERATING CONDITION DISPLAY THROUGH COLOUR CHANGE

The status of the iSTEP (Pro+) (ready, active, warning, error message) is indicated by a colour change in the display and is thus instantly recognisable. Messages are displayed on the graphic display in plain text and in several languages. The pump comes equipped with a diaphragm monitoring system as standard. Service recommendations are also displayed, thus minimising downtimes.


iSTEP XS TECHNICAL DATA/CHARACTERISTICS

PUMP DATA			iSTEP XS 7	iSTEP XS 15
Permissible pressure p_{2max} at the pump outlet	bar		10	7
Nominal capacity QN at p_{2max}	l/h		7	15
Capacity min. (1:1000)	l/h		0,007	0,015
Quantity per stroke	ml/Stroke	(100%)	0,61	1,47
Max. suction height	mWS		3	3
Min./max. permissible pressure at the pump inlet	bar	$p_{1min/max}$	-0,3/0,5	-0,3/0,5
Recommended nominal diameter DN of the connecting pipes	mm		3	5
Nominal stroke frequency	1/min		190	170
Weight approx.	kg	plastic	3,6	3,6
		stainless steel	4,0	4,0

ELECTRICAL DATA		iSTEP XS...
Power consumption	W	45
Voltage	V	100 - 240 AC
Frequency	Hz	50/60
Insulation class	ISO	F
Recommended fuse	(circuit breaker)	C10A
Enclosure		IP65

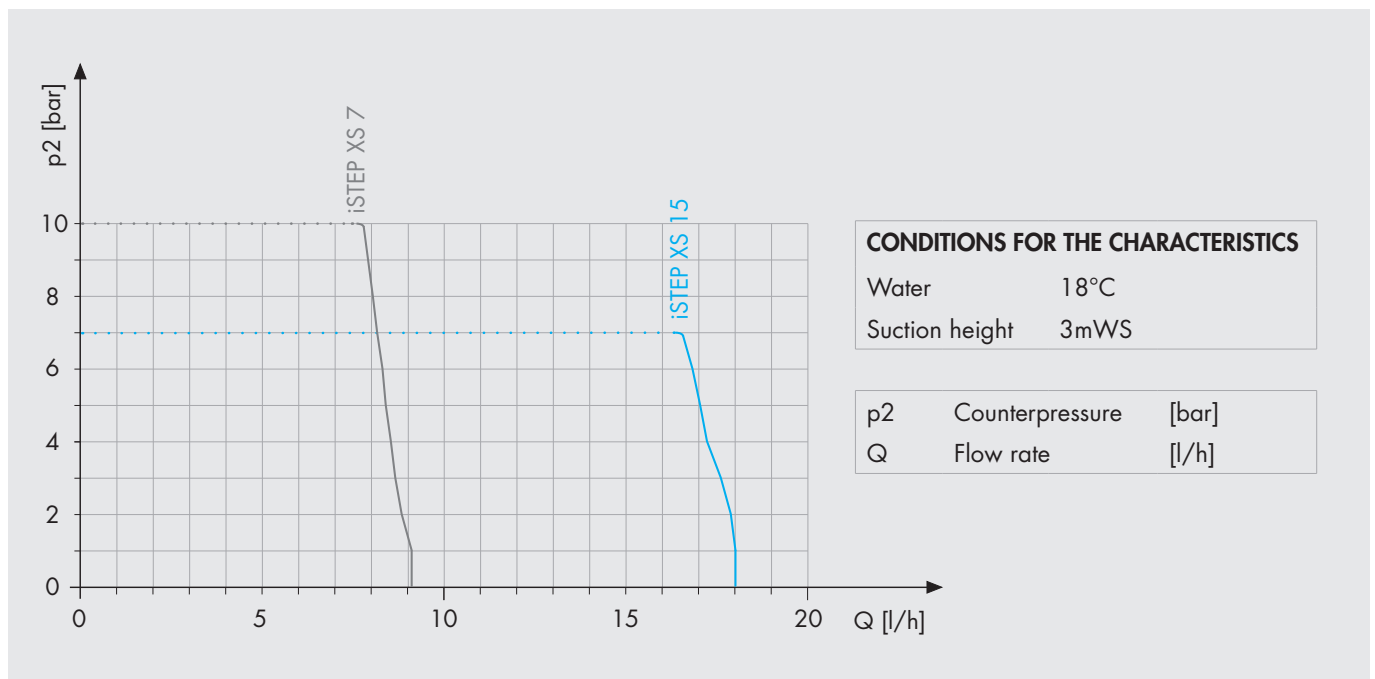

MEASUREMENT

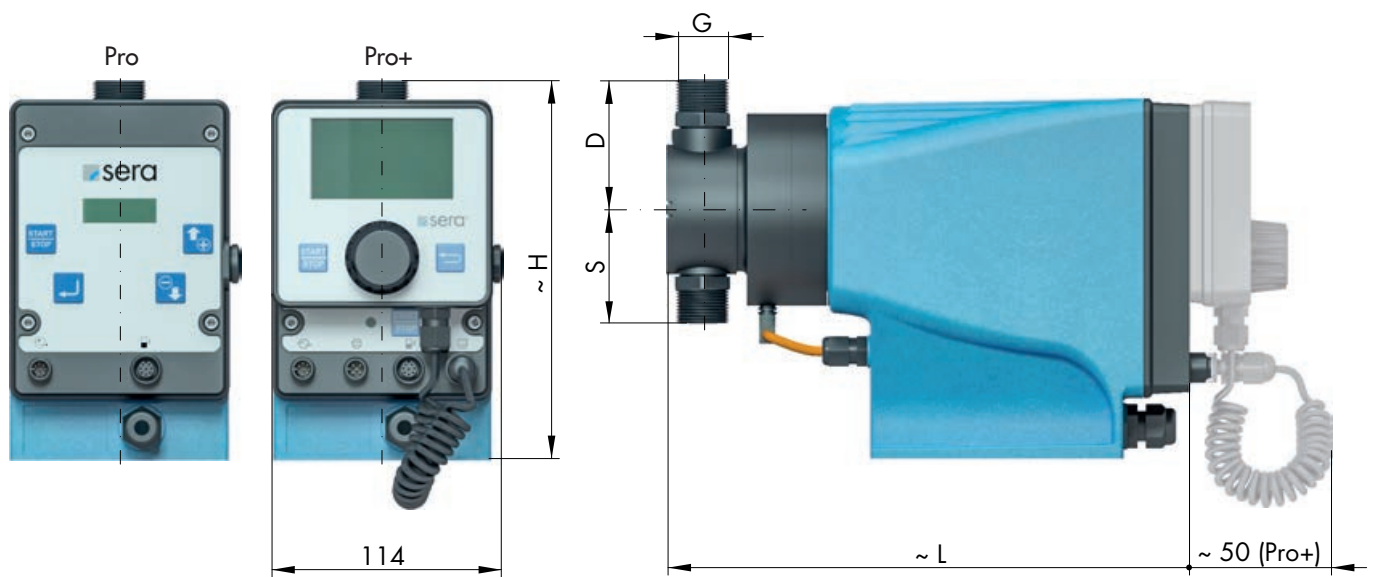


SUCTION VALVES			iSTEP XS 7	iSTEP XS 15
DN	Nominal weight		3	5
G	Connection thread	PVC, PP-/PVDF-FRP, 1.4571	G3/4	G3/4
S	Double valves	PVC	57	65
S	Double valves	PP-/PVDF-FRP	56	57
S	Double valves	1.4571	57	65
PRESSURE VALVES				
DN	Nominal weight		3	5
G	Connection thread	PVC, PP-/PVDF-FRP, 1.4571	G3/4	G3/4
D	Double valves	PVC	57	65
D	Double valves	PP-/PVDF-FRP	64	65
D	Double valves	1.4571	57	65
TOTAL HEIGHT				
H		PVC	180	188
H		PP-/PVDF-FRP	187	188
H		1.4571	180	188
TOTAL LENGTH				
L		PVC	260	264
L		PP-/PVDF-FRP	260	265
L		1.4571	260	264

(Dimensions in mm)


iSTEP S TECHNICAL DATA/CHARACTERISTICS

PUMP DATA			iSTEP S 20	iSTEP S 30	iSTEP S 40	iSTEP S 50
Permissible pressure p2max. at the pump outlet	bar		10	7	6	3
Nominal capacity QN at p2 max.	l/h	50/60 Hz	20	30	40	50
Capacity min. (1:1000)	l/h	50/60 Hz	0,02	0,03	0,04	0,05
Capacity min. (1:100)*	l/h	50/60 Hz	0,2	0,3	0,4	0,5
Quantity per stroke	ml/stroke	(100%)	1,75	3,33	3,51	4,39
Max. suction height	mWC		3	3	3	3
Min./max. permissible pressure at the pump inlet	bar	p _{1min/max}	-0,3/0,5	-0,3/0,5	-0,3/0,5	-0,3/0,5
Recommended DN of the connecting pipes	mm		5	5	5	8
Nominal stroke frequency	1/min	50/60 Hz	190	150	190	190
Weight approx.	kg	plastic	7,3	7,3	7,3	7,4
		stainless steel	7,9	8,5	8,5	8,7
		stainless steel (CIP)	9,0	11,7	11,7	11,8

ELECTRICAL DATA		iSTEP S...
Power consumption	W	34
Voltage	V	110 - 240 AC
Frequency	Hz	50/60
Insulation class	ISO	F
Recommended fuse	(circuit breaker)	C10A
Enclosure		IP65

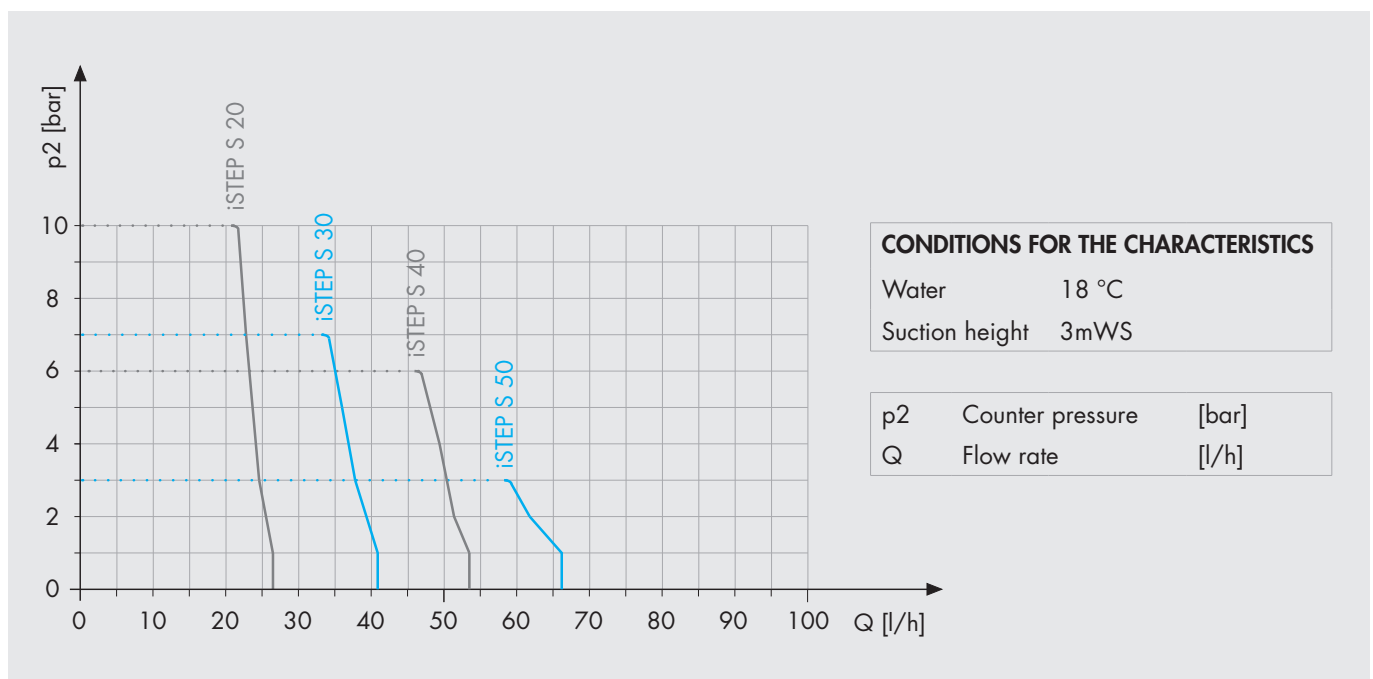

MEASUREMENT

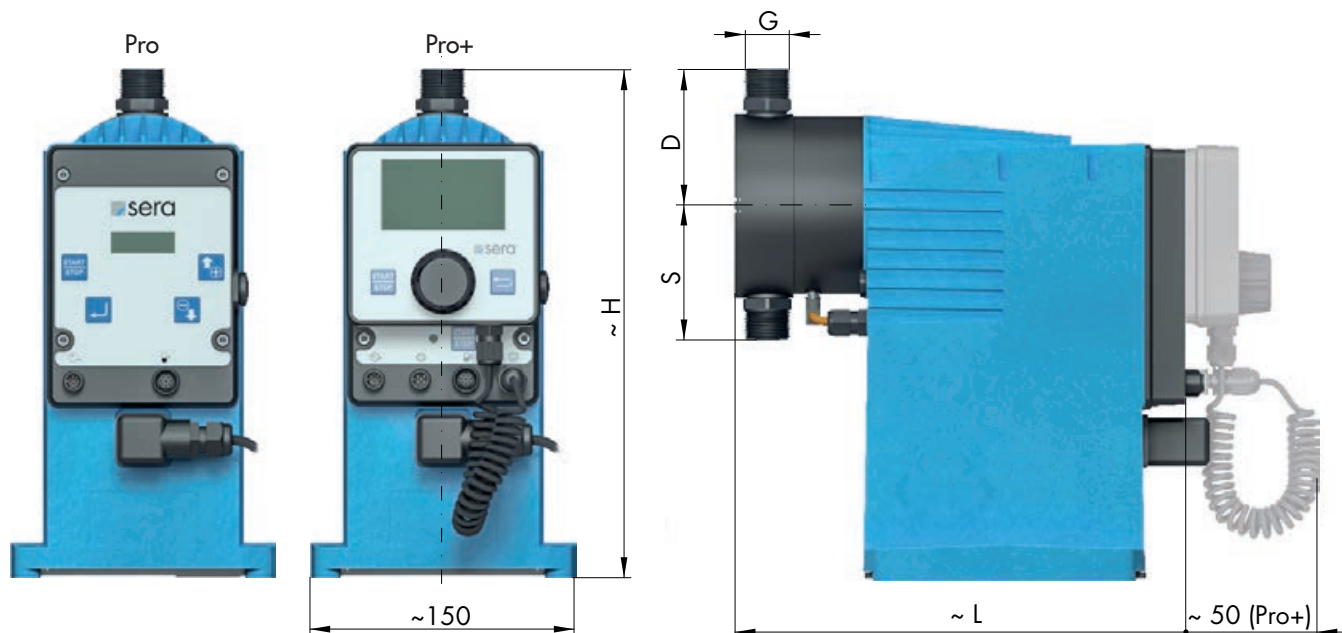

SUCTION VALVES			iSTEP S 20	iSTEP S 30	iSTEP S 40	iSTEP S 50
DN	Nominal weight		5	5	5	8
G	Connection thread	PVC, PP-/PVDF-FRP, 1.4571	G3/4	G3/4	G3/4	G3/4
G	Connection thread	1.4435	Rd28x1/8"	Rd28x1/8"	Rd28x1/8"	Rd28x1/8"
S	Double valves	PVC	65	72	72	75,1
S	Double valves	PP-/PVDF-FRP	56,6	69,6	69,6	76,1
S	Double valves	1.4571	65	72	72	75,5
S	Double valves	1.4435	122,5	122,5	122,5	122,5
PRESSURE VALVES						
DN	Nominal weight		5	5	5	8
G	Connection thread	PVC, PP-/PVDF-FRP, 1.4571	G3/4	G3/4	G3/4	G3/4
G	Connection thread	1.4435	Rd28x1/8"	Rd28x1/8"	Rd28x1/8"	Rd28x1/8"
D	Double valves	PVC	65	72	72	75,1
D	Double valves	PP-/PVDF-FRP	64,6	69,6	69,6	76,1
D	Double valves	1.4571	65	72	72	75,5
D	Double valves	1.4435	122,5	122,5	122,5	122,5
TOTAL HEIGHT						
H	PVC		275	282	282	285
H	PP-/PVDF-FRP		275	280	280	286
H	1.4571		275	282	282	286
H	1.4435		333	333	333	333
TOTAL LENGTH						
L	PVC		270	275	275	275
L	PP-/PVDF-FRP		270	270	270	270
L	1.4571		270	275	275	275
L	1.4435		295	295	295	295

(Dimensions in mm)

iSTEP M TECHNICAL DATA/CHARACTERISTICS

PUMP DATA			iSTEP M 75	iSTEP M 130	iSTEP M 200
Permissible pressure p_{2max} at the pump outlet	bar		10	7	4
Nominal capacity QN at p_{2max}	l/h		75	130	200
Capacity min. (1:1000)	l/h		0,075	0,13	0,2
Quantity per stroke	ml/Stroke	(100%)			
Max. suction height	mWS		5	5	5
Min./max. permissible pressure at the pump inlet	bar	$p_{1min/max}$	-0,5/0,5	-0,5/0,5	-0,5/0,5
Recommended nominal diameter DN of the connecting pipes	mm				
Nominal stroke frequency	1/min		180	190	190
Weight approx.	kg	plastic	15	15	15
		stainless steel	25	25	25

ELECTRICAL DATA		iSTEP M...
Power consumption	W	71
Voltage	V	100 - 240 AC
Frequency	Hz	50/60
Insulation class	ISO	F
Recommended fuse	(circuit breaker)	C10A
Enclosure		IP65

KENNLINIEN




CONDITIONS FOR THE CHARACTERISTICS

Water 18 °C
Suction height 3mWS

p_2 Counter pressure [bar]
Q Flow rate [l/h]


MEASUREMENT

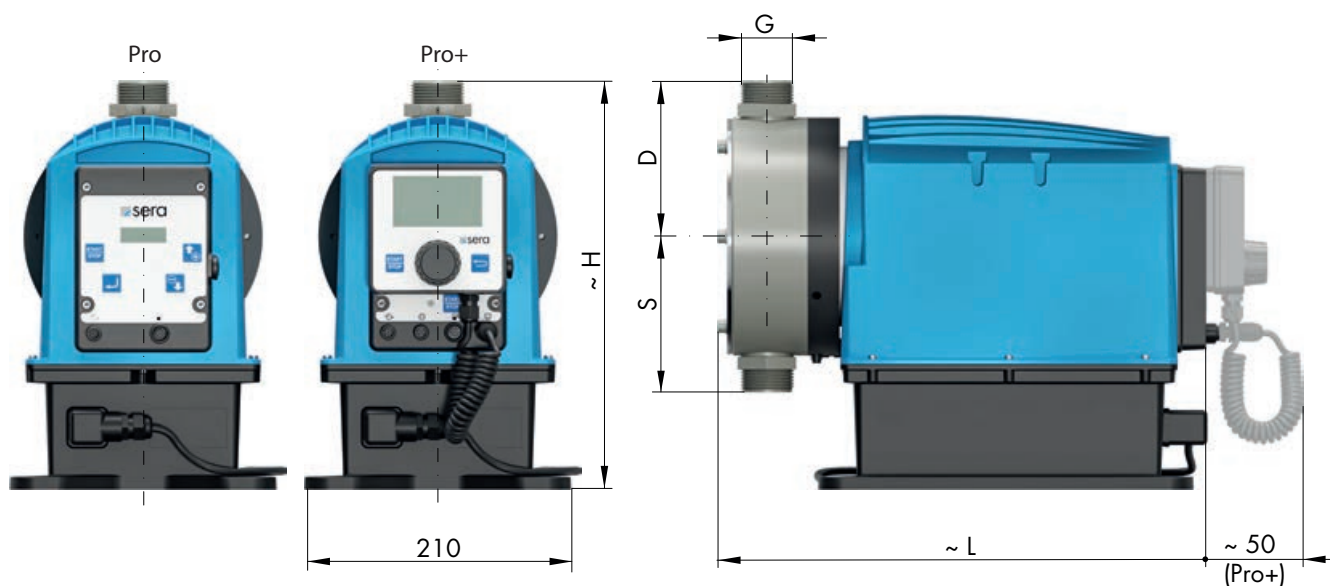

SUCTION VALVES			iSTEP M 75	iSTEP M 130	iSTEP M 200
DN	Nominal weight		12	12	12
G	Connection thread	PVC, PP-/PVDF-FRP, 1.4571	G1 1/4	G1 1/4	G1 1/4
S	Double valves	PVC	100	113	123
S	Double valves	PP-/PVDF-FRP	100	113	123
S	Double valves	1.4571	100	113	123
PRESSURE VALVES					
DN	Nominal weight		12	12	12
G	Connection thread	PVC, PP-/PVDF-FRP, 1.4571	G1 1/4	G1 1/4	G1 1/4
D	Double valves	PVC	100	113	123
D	Double valves	PP-/PVDF-FRP	100	113	123
D	Double valves	1.4571	100	113	123
TOTAL HEIGHT					
H	PVC		300	313	323
H	PP-/PVDF-FRP		300	313	323
H	1.4571		300	313	323
TOTAL LENGTH					
L	PVC		390	390	390
L	PP-/PVDF-FRP		390	390	390
L	1.4571		390	390	390

(Dimensions in mm)

FOLLOW US

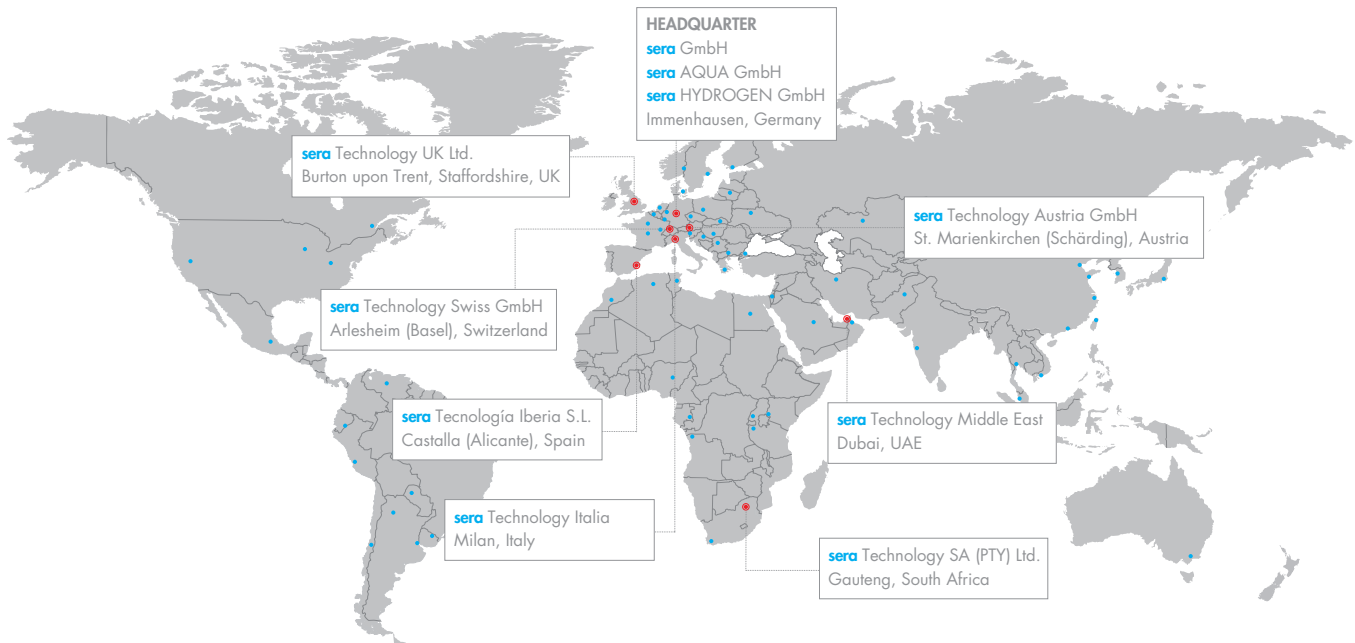

WORKING FOR YOU ALL OVER THE WORLD

sera GmbH

sera-Straße 1
34376 Immenhausen
Germany

Tel.: +49 5673 999-00

info@sera-web.com

sera AQUA GmbH

sera-Straße 1
34376 Immenhausen
Germany

Tel.: +49 5673 999-02

sales.aqua@sera-web.com

sera HYDROGEN GmbH

sera-Straße 1
34376 Immenhausen
Germany

Tel.: +49 5673 999-04

sales.hydrogen@sera-web.com

sera Technology Austria GmbH

Gewerbestraße 5
4774 St. Marienkirchen bei Schärding
Austria

Tel.: +43 771 131 7770

sales.at@sera-web.com

sera Technology Swiss GmbH

Altenmattweg 5
4144 Arlesheim
Switzerland

Tel.: +41 615 114 260

sales.ch@sera-web.com

sera Tecnología Iberia S.L.

Calle Cocentaina n°8,
03420 Castalla (Alicante)
Spain

Tel.: +34 666 024 388

sales.es@sera-web.com

sera Technology UK Ltd.

Unit 5, Granary Wharf Business Park
Wetmore Road, Burton upon Trent
Staffordshire DE14 1DU
United Kingdom

Tel.: +44 1283 753 400

sales.uk@sera-web.com

sera Technology SA (PTY) Ltd.

Unit 3-4, Airborne Park
Cnr Empire & Taljaard Str Bartletts
Boksburg, 1459 Gauteng
South Africa

Tel.: +27 113 975 120

sales.za@sera-web.com

sera Tecnología Italia

Milan
Italy

Tel.: +39 340 81 92 744

sales.it@sera-web.com

sera Technology Middle East

Dubai
UAE

Tel.: +971 589 287 559

sales.mena@sera-web.com

www.sera-web.com

