

CAPABILITY

COMPRESSOR STATION




CLEAN - SAFE - RELIABLE

CAPABILITY COMPRESSOR STATION

Compressor stations of the CAPABILITY series are used, among other things, for district and industry power solutions. For self-sufficient supply tasks for heat or electricity, the **sera** CAPABILITY compresses hydrogen for long-term storage. The booster solution is designed for filling long-term energy storage systems or emergency power solutions. The sera solution enables the year-round, independent and emission-free operation of energy and heat supply systems.

APPLICATION

In its function, the CAPABILITY increases the pressure of the hydrogen. The system limits are thus the supply line or the gas outlet. In the CAPABILITY, the hydrogen is highly compressed as required in order to increase the energy density of the medium. An electrolysis system or other hydrogen sources can be located upstream. Downstream are storage tanks and consumers.

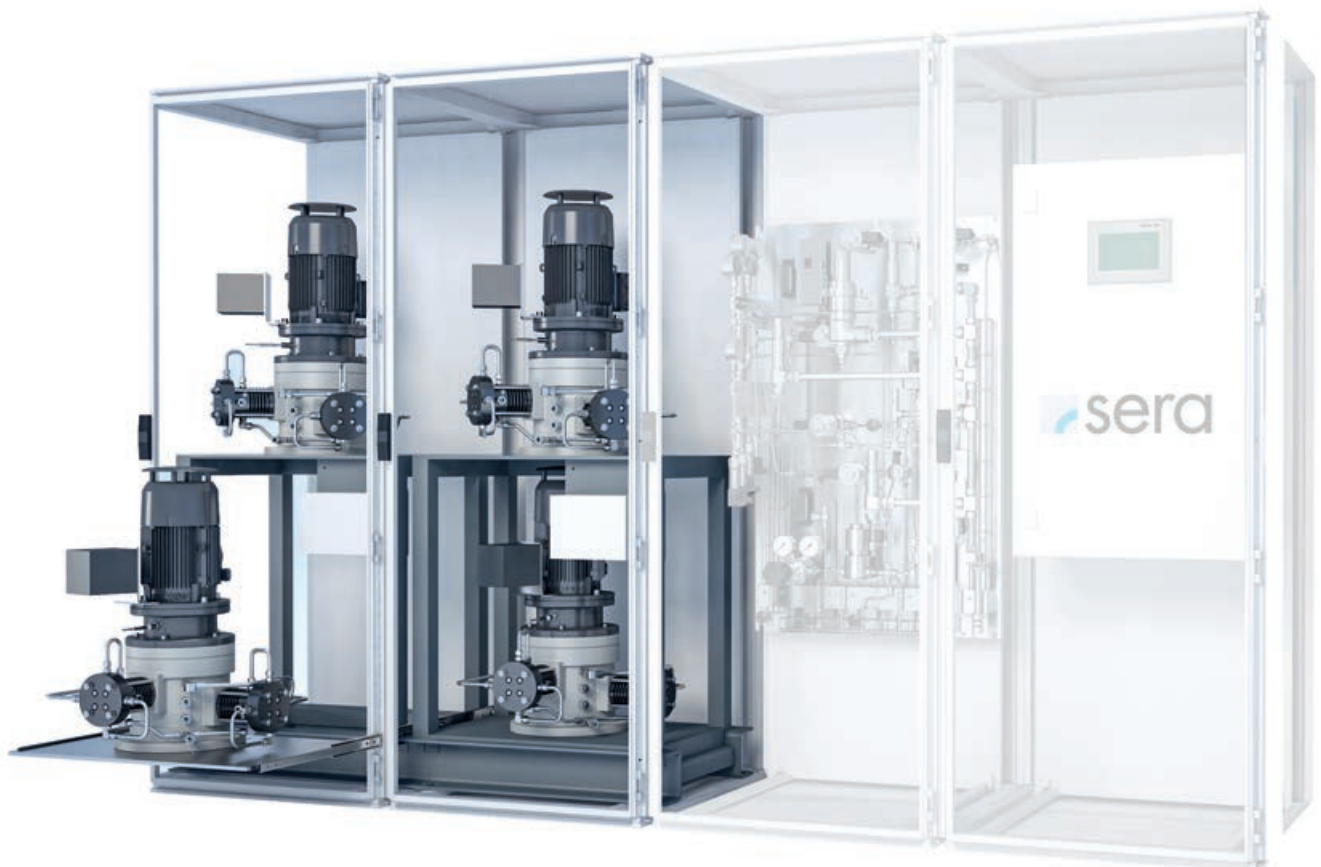

The core of the CAPABILITY consists of one to four AGILITY connected in parallel. Instrumentation and a corresponding control system are optional.
Note: if the instrumentation option is selected, a control system is mandatory!

CAPABILITY COMPRESSOR STATION

The modular design of the AGILITY makes the compressor system flexibly expandable. By adding up to four AGILITYs, systems with larger delivery volumes can be designed.




Control (Option)



Instrumentation (Option)

DIMENSIONS

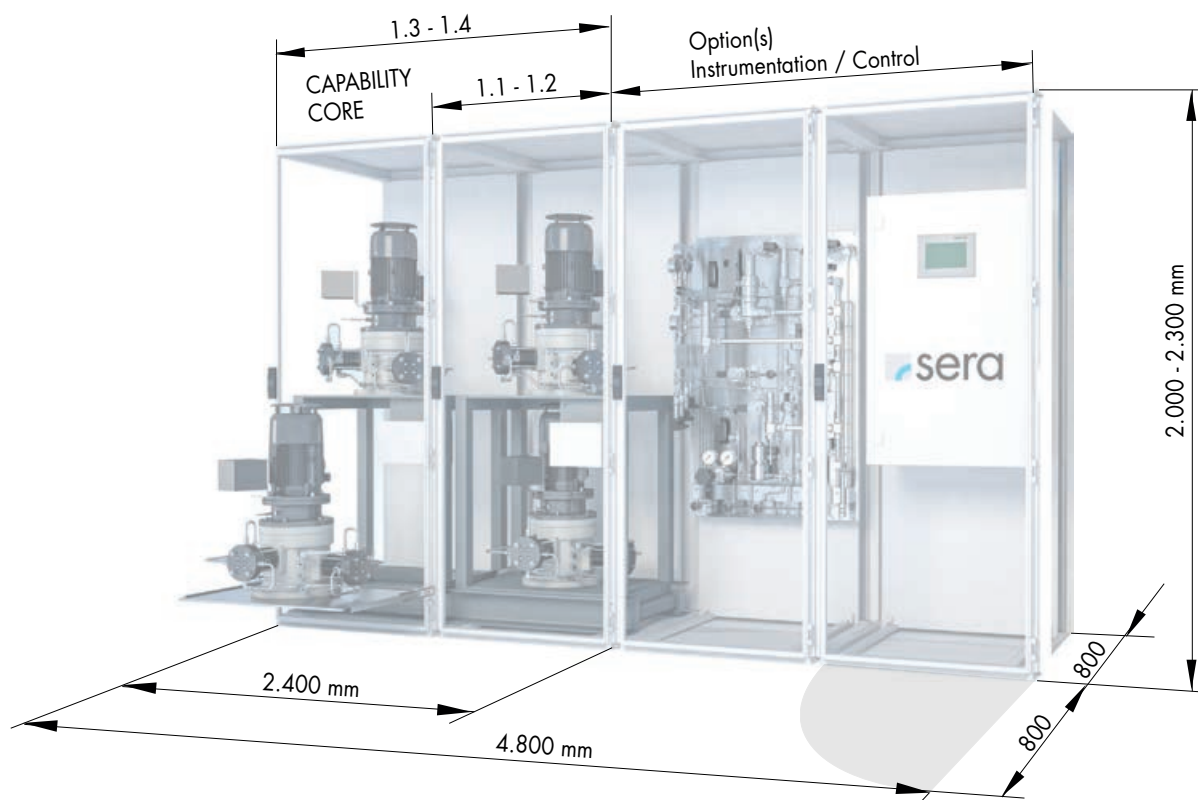

CAPABILITY SYSTEM- AND COMPRESSOR DATA

SYSTEM DATA

Inlet pressure	25-30 bar(g)
Outlet pressure	300 bar(g)

Delivery rate with test gas helium at 30 bar(g) inlet pressure

CAPABILITY 1.1	$\geq 2,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 3,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
CAPABILITY 1.2	$\geq 4,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 6,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
CAPABILITY 1.3	$\geq 6,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 9,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
CAPABILITY 1.4	$\geq 8,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 12,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure

COMPRESSOR DATA

Inlet pressure (PS)	Short-term min. 10 bar(g) Operation 25 - 30 bar(g) Housing pressure max. 40 bar(g)
Outlet pressure	max. 300 bar(g)
Delivery rate per AGILITY with test gas helium at 30 bar(g) inlet pressure	$\geq 2,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 3,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
Protection class	IP 55
Noise emission	< 60 dB(A)
Corrosion protection	Painting C2 according to DIN EN ISO 12944-2

ENVIRONMENTAL CONDITIONS

Max. installation height	1,000 m above sea level, higher placement with de-rating
Ambient temperature	-15 °C - +40 °C


CONVEYING MEDIUM


Gas type	Hydrogen 5.0, dry, solids-free (if lower qualities are used, but at least 3.5, this may result in altered sealing behaviour)
Inlet temperature	Max. 30°C
Dew point hydrogen	-50°C at 1 bar
Compressor contamination	Abrasion due to seals, initial lubricant

CAPABILITY SYSTEM- AND COMPRESSOR DATA

DRIVE/MOTOR	
Motor type of the individual compressors	Asynchronous motor, 4-pole
Speed	approx. 540 rpm (18Hz) and 750 rpm (25Hz)
Electrical voltage	220 VAC (Y)
Drive power per compressor	2.200 W; 750 W (at 16Hz)
Continuous power consumption per compressor	approx. 650 W

INTERFACES	
Electrical	potential-free contacts
Communication	PROFINET
Gas inlet	½"
Gas outlet	½"
Purge connection	½"
Blow-off line	½"

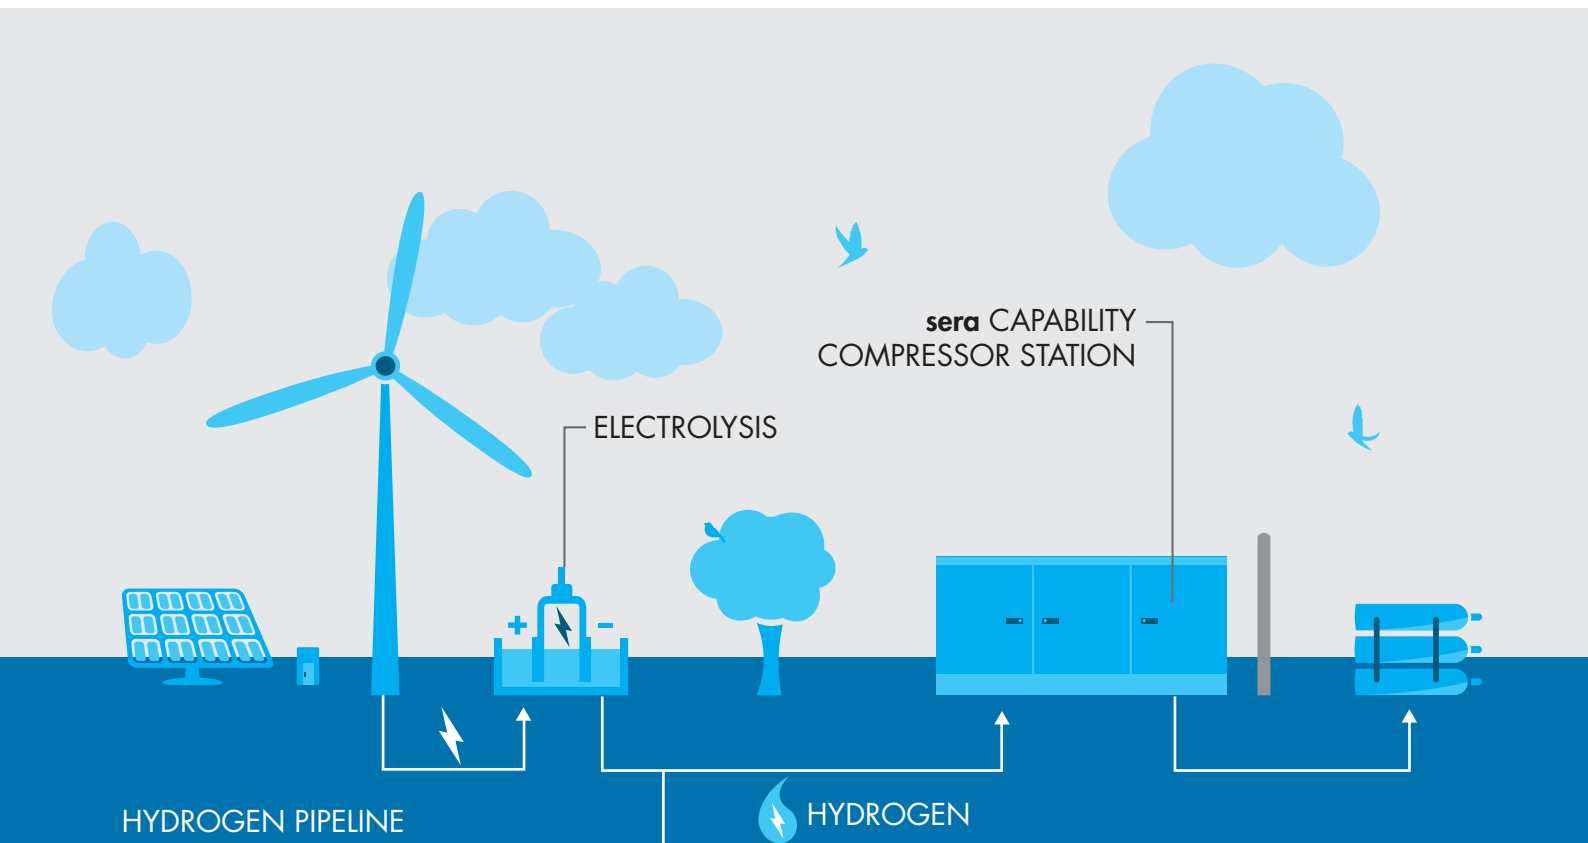

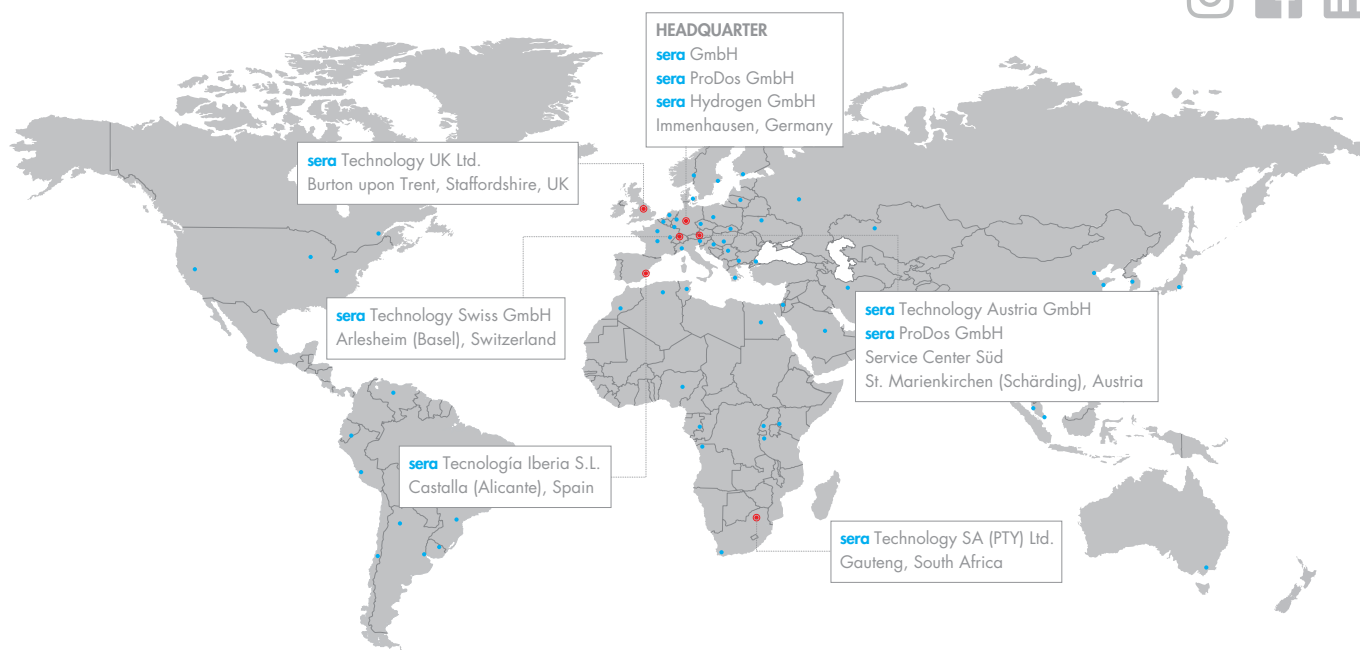

Working for you all over the world

sera GmbH
 sera-Straße 1
 34376 Immenhausen
 Germany

Tel.: +49 5673 999-02
 Fax: +49 5673 999-03

info@sera-web.com
 www.sera-web.com

sera ProDos GmbH Service Center Süd
 Gewerbestraße 5
 4774 St. Marienkirchen (Schärding)
 Austria

Tel.: +49 5673 999-02
 Fax: +49 5673 999-03

sales.prodos@sera-web.com
 www.sera-web.com

sera Technology UK Ltd.
 Unit 5, Granary Wharf Business Park
 Wetmore Road, Burton upon Trent
 Staffordshire DE14 1DU
 United Kingdom

Tel.: +44 1283 753400
 Fax: +44 1283 753401

sales.uk@sera-web.com
 www.sera-web.com

sera ProDos GmbH
 sera-Straße 1
 34376 Immenhausen
 Germany

Tel.: +49 5673 999-02
 Fax: +49 5673 999-03

sales.prodos@sera-web.com
 www.sera-web.com

sera Technology Austria GmbH
 Gewerbestraße 5
 4774 St. Marienkirchen (Schärding)
 Austria

Tel.: +43 7711 31777-0
 Fax: +43 7711 31777-20

sales.at@sera-web.com
 www.sera-web.com

sera Technology SA (PTY) Ltd.
 Unit 3-4, Airborne Park
 Cnr Empire & Taljaard Str Bartletts
 Boksburg, 1459 Gauteng
 South Africa

Tel.: +27 11 397 5120
 Fax: +27 11 397 5502

sales.za@sera-web.com
 www.sera-web.com

sera Hydrogen GmbH
 sera-Straße 1
 34376 Immenhausen
 Germany

Tel.: +49 5673 999-04
 Fax: +49 5673 999-05

sales.hydrogen@sera-web.com
 www.sera-web.com

sera Technology Swiss GmbH
 Altenmatteweg 5
 4144 Arlesheim
 Switzerland

Tel.: +41 61 51142-60
 Fax: +41 61 51142-61

sales.ch@sera-web.com
 www.sera-web.com

sera Tecnología Iberia S.L.
 Calle Cocentina n°8,
 03420 Castalla
 (Alicante)
 Spain

Mob: +34 610 418898

sales.es@sera-web.com
 www.sera-web.com